

Product Datasheet

www.1-light.eu

04 Recessed Spots Adjustable LED>The 1W Mini Square Natural Aluminium 51301AL/D/15




3x1W LED adjustable recessed spot, mini series range, IP20.

Requires 350mA driver.

Complies with standard EN60598-1 and any other specific standards.



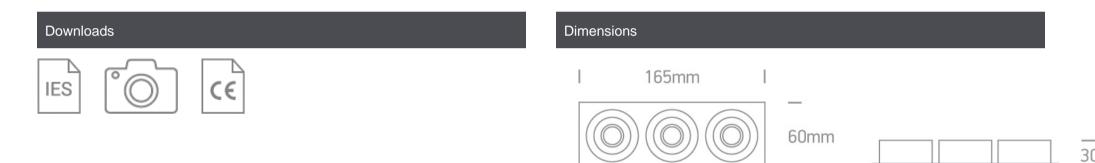

Gallery



Must be ordered separately





89004

89004T



Physical Specification

| Item Group | 04 Recessed Spots Adjustable LED |
|--------------------|--------------------------------------|
| Family | The 1W Mini Square Natural Aluminium |
| Order Code | 51301AL/D/15 |
| Colour | Aluminium |
| Material | Natural Aluminium |
| Diffuser Material | Acrylic |
| Shape | Rectangular |
| Length | 165mm |
| Width | 60mm |
| Height | 30mm |
| Cutout Hole Width | 155mm |
| Cutout Hole Length | 53mm |
| Recessed Ceiling | Yes |
| Depth Required | 40mm |
| Indoor | Yes |
| Adjustable | 2 Directions |

Electrical Characteristics

| Fitting | | |
|---------------|------------------|--|
| Input Type | Constant Current | |
| Input Current | 350mA | |
| Safety Class | | |
| Power(Watte) | 3/// | |

| Power(Watts) | 3W |
|--------------|--------------|
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Number | 3 |
| Cable Length | 40cm |
| F Mark | F |
| | |



Illumination Data

| Colour Temperature | 6000K |
|----------------------|--------|
| Lumen Output | 3x60lm |
| Light Efficiency | 60lm/W |
| Beam Angle | 15° |
| Illumination Diagram | |

Packing Info Pcs/Carton 50 Barcode 5291889005469 HS Code 9405409900

| 2 Years |
|---------|
| Yes |
| |

switch to one light!



