

14 Plafo>UGR19 Backlit CCT V

62140BAU/W/V



60x60cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser. Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



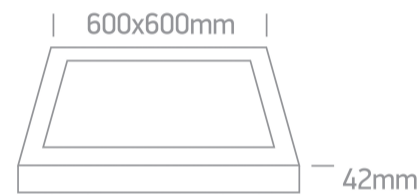

Dimensions




Physical Specification

Item Group	14 Plafo
Family	UGR19 Backlit CCT V
Order Code	62140BAU/W/V
Colour	White
Material	Aluminium + Steel
Length	600mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25W-38W
Constant Current	Yes
1000mA	25V-38V

IP Rating

IP20

Dimmable

No

## Illumination Data

Colour Temperature

3000K-4000K-5700K

Lumen Output

3600lm-4000lm-3800lm

Light Efficiency

90lm/W - 100lm/W - 95Lm/W

CRI

80

Illumination Diagram



UGR

19

## Packing Info

Box Weight

2.800kg

Pcs/Carton

4

Barcode

5291889077176

HS Code

9405413990

## Certification & Warranty

Warranty

3 years

switch to  
**one light!**

one  
LIGHT

