


14 Plafo>UGR19 Backlit CCT V

62140BFU/B/V

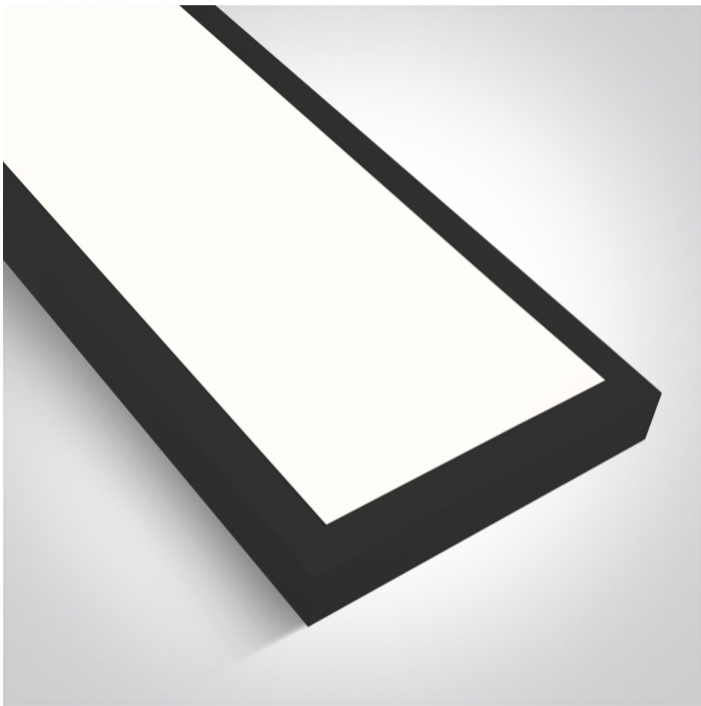

15x120cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	14 Plafo
Family	UGR19 Backlit CCT V
Order Code	62140BFU/B/V
Colour	Black
Material	Aluminium + Steel
Shape	Rectangular
Length	1200mm
Width	150mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1000mA

Voltage

36V

Power(Watts)

28.8W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

25W-38W

Power Factor	0,9
Constant Current	Yes
1000mA	25-40V
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	2700lm-3000lm-2850lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	2.125kg
Pcs/Carton	4
Barcode	5291889077305
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!

one
LIGHT

