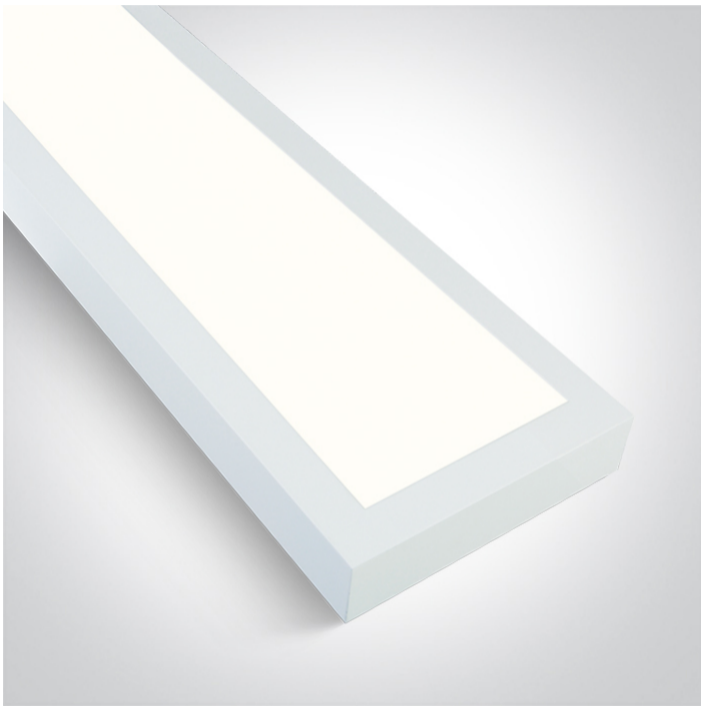## 14 Plafo>LED Aluminium Panel Range Backlit

62140BF/W/C

15x120cm surface mounted backlit LED panel. Uniform lighting, ideal for commercial applications.
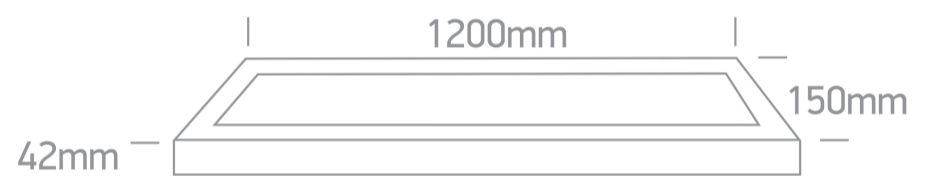
Complete with 800mA driver.

Complies with standard EN60598-1 and any other specific standards.

IP20 80 CRI CE

Downloads

IES

Dimensions

1200mm
150mm
42mm

Physical Specification	
Item Group	14 Plafo
Family	LED Aluminium Panel Range Backlit
Order Code	62140BF/W/C
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	1200mm
Width	150mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

one

Electrical Characteristics

Gear	Built In

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	▣
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	▽F

Fitting

Input Type	Constant Current
Input Current	800mA
Voltage	36V
Power(Watts)	28.8W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
F Mark	▽F

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	20W-32W

Power Factor	0,9
Constant Current	Yes
800mA	25V-40V
IP Rating	IP20
Dimmable	No
Brand	ONE

Illumination Data

Colour Temperature	4000K
Lumen Output	3000lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Weight	1.975kg
Pcs/Carton	4
Barcode	5291889077282
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!