


14 Plafo>UGR19 Backlit CCT V

62140BRU/B/V

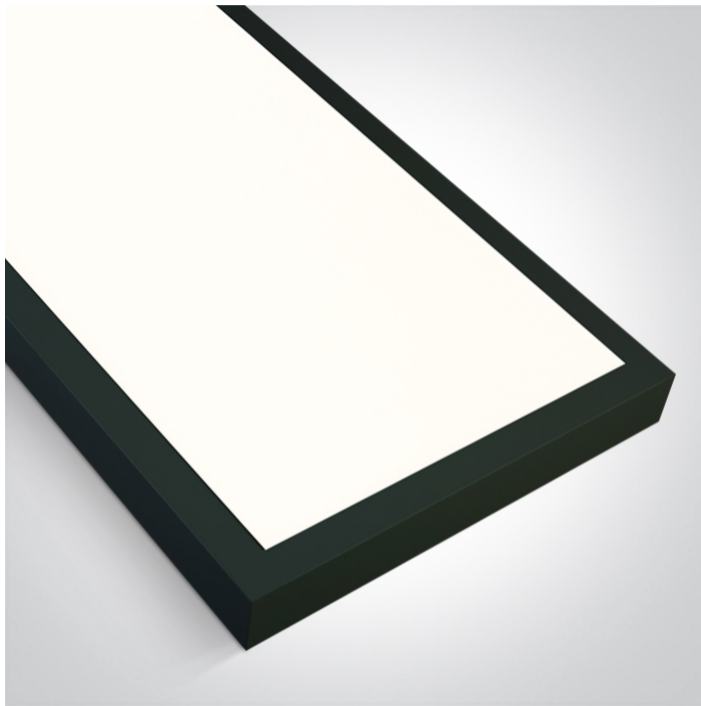

30x120cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

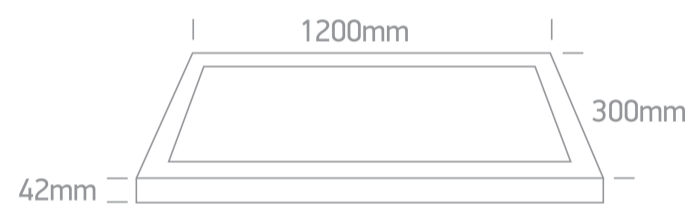

## Physical Specification

Item Group	14 Plafo
Family	UGR19 Backlit CCT V
Order Code	62140BRU/B/V
Colour	Black
Material	Aluminium + Steel
Shape	Rectangular
Length	1200mm
Width	300mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

40W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1000mA

Voltage

38V

Power(Watts)

38W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)


25W-38W

Constant Current
1000mA
IP Rating
Dimmable
Housing Material

Yes
25V-38V
IP20
No
Plastic

### Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-5700K
3600lm-4000lm-3800lm
90lm/W - 100lm/W - 95Lm/W
80

19

### Packing Info

Box Weight
Pcs/Carton
Barcode
HS Code

2.950kg
4
5291889077237
9405413990

### Certification & Warranty

Warranty
Weee Directive

3 years
Yes

switch to  
**one light!**

**one**  
LIGHT

