

14 Plafo>The Ultra Slim LED Plafo Aluminium

62140FB/W/C



40W LED slim plafo light, IP20, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

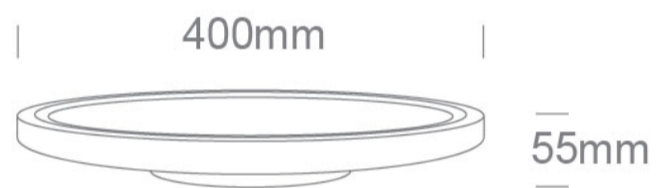

Physical Specification

Item Group	14 Plafo
Family	The Ultra Slim LED Plafo Aluminium
Order Code	62140FB/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	55mm
Diameter	400mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

40W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1000mA

Voltage

39V

Safety Class



Power(Watts)

39W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz


Yes

60 Hz

Yes

Power(Watts)	25-42W
Power Factor	0,9
Constant Current	Yes
1000mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	40°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Cable
Fast Connector	Yes
Fast Connector Type	Other
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	3500lm
Light Efficiency	87,5lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Weight	2.700kg
Pcs/Carton	4
Barcode	5291889057413
HS Code	9405413990

Certification & Warranty

switch to
one light!

one
LIGHT

