


14 Plafo>UGR19 Backlit CCT V

62150BFU/B/V

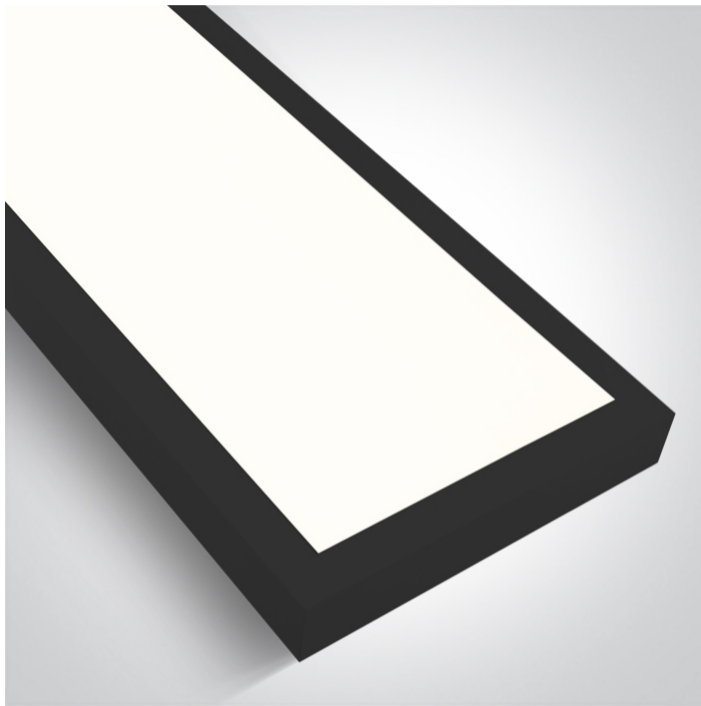

15x150cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

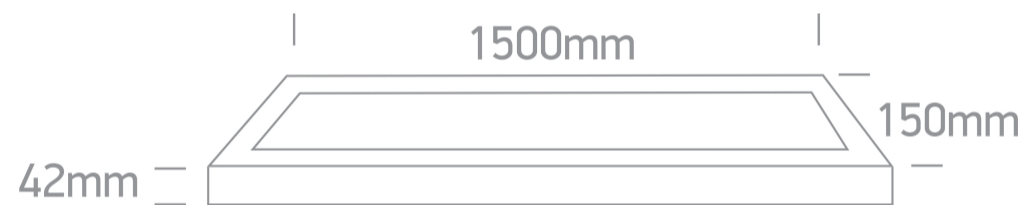

Physical Specification

Item Group	14 Plafo
Family	UGR19 Backlit CCT V
Order Code	62150BFU/B/V
Colour	Black
Material	Aluminium + Steel
Shape	Rectangular
Length	1500mm
Width	150mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

40W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1000mA

Voltage

38V

Power(Watts)

38W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

25W-38W

Power Factor	0,9
Constant Current	Yes
1000mA	25V-38V
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	3600lm-4000lm-3800lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	2.750kg
Pcs/Carton	4
Barcode	5291889077329
HS Code	9405413990

Certification & Warranty

Warranty	3 years
Weee Directive	Yes

switch to
one light!

one
LIGHT

