


14 Plafo>UGR19 Backlit CCT V

62150BRU/B/V

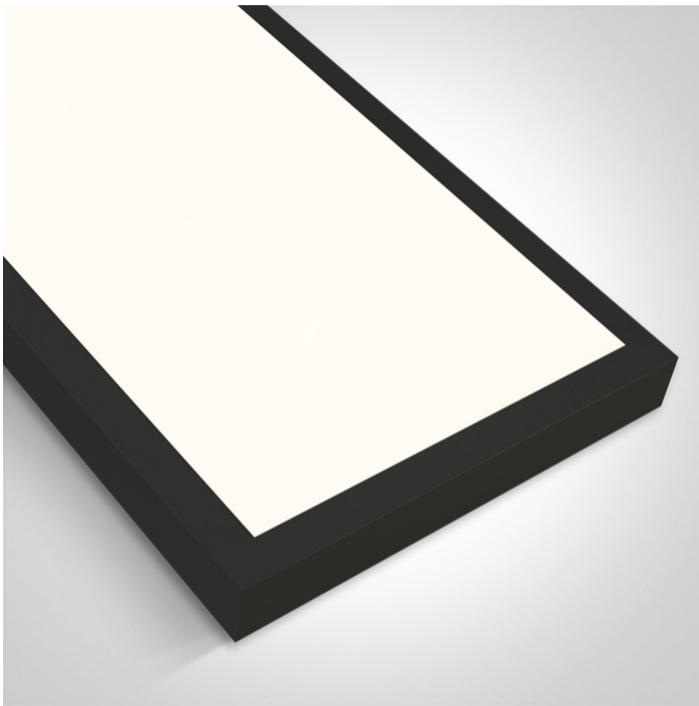

30x150cm adjustable CCT surface mounted backlit LED panel with microprismatic diffuser.

Uniform lighting, ideal for commercial applications.

Complete with 1200mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

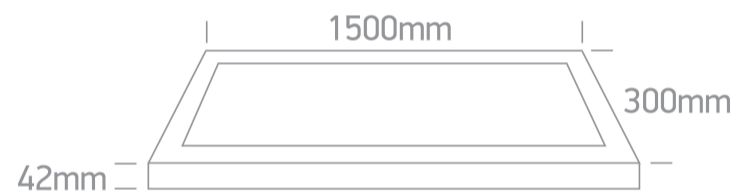

Physical Specification

Item Group	14 Plafo
Family	UGR19 Backlit CCT V
Order Code	62150BRU/B/V
Colour	Black
Material	Aluminium + Steel
Shape	Rectangular
Length	1500mm
Width	300mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

50W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1200mA

Voltage

38V

Power(Watts)

45,6W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz


Yes

Power(Watts)

30W-45,6W

Power Factor	0,9
Constant Current	Yes
1200mA	25-38V
IP Rating	IP20
Dimmable	No

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	4500lm-5000lm-4750lm
Light Efficiency	90lm/W - 100lm/W - 95Lm/W
CRI	80
Illumination Diagram	
UGR	19

Packing Info

Box Weight	4.075kg
Pcs/Carton	4
Barcode	5291889077459
HS Code	9405413990

Certification & Warranty

Warranty	3 years
----------	---------

switch to
one light!

one
LIGHT

