

## 14 Plafo>The LED Slim Plafo Range Round

## 67366/W/W



12W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

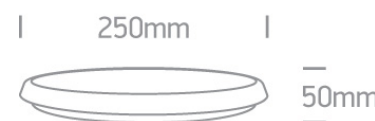

### Physical Specification

Item Group	14 Plafo
Family	The LED Slim Plafo Range Round
Order Code	67366/W/W
Colour	White
Material	PC
Shape	Circular
Height	50mm
Diameter	250mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

## Gear

## Built In

## Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



## Fitting

Input Type

Constant Current

Input Current

160mA

Voltage

70V

Power(Watts)

11,2W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark



## Gear

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	12W
Power Factor	0,9
Constant Current	Yes
Output	160mA
Voltage Range	70V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable

#### Illumination Data

Colour Temperature	3000K
Lumen Output	900lm
Light Efficiency	75lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	26cm
Box Width	26cm
Box Height	5,7cm
Box Weight	0.805kg
Pcs/Carton	20
Carton Length	60cm
Carton Width	54cm
Carton Height	29cm
Carton Weight	15,5Kg

Barcode

5291889043034

HS Code

9405114090

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

