

14 Plafo>The LED Slim Plafo Range PC

## 67372/W/C



25W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

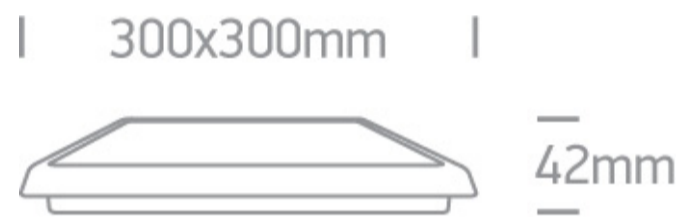

### Physical Specification

Item Group	14 Plafo
Family	The LED Slim Plafo Range PC
Order Code	67372/W/C
Colour	White
Material	PC
Shape	Rectangular
Length	300mm
Width	300mm
Height	40mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes

Adjustable

No

IK Rating

8

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

25W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



### Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

80V

Power(Watts)

24W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

LED Number

335


F Mark




Gear

Gear Type

Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	18,6-24,8W
Power Factor	0,9
Constant Current	Yes
Output	310mA
Voltage Range	60-80V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable

#### Illumination Data

Colour Temperature	4000K
Lumen Output	2000lm
Light Efficiency	80lm/W
CRI	80
Illumination Diagram	

#### Packing Info

Box Length	31cm
Box Width	31cm
Box Height	5cm
Box Weight	1.190kg
Pcs/Carton	10
Barcode	5291889043164
HS Code	9405114090

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

