

14 Plafo>Outdoor Project LED Plafo Die cast

67384A/W/W



30W LED slim plafo, IP54, ideal for both indoor and outdoor installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

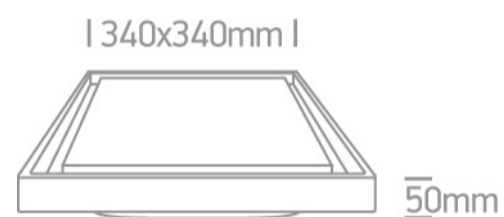

Physical Specification

| | |
|-----------------|------------------------------------|
| Item Group | 14 Plafo |
| Family | Outdoor Project LED Plafo Die cast |
| Order Code | 67384A/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 340mm |
| Width | 340mm |
| Height | 50mm |
| Surface Ceiling | Yes |
| Indoor | Yes |
| Outdoor | Yes |

Adjustable

No

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

700mA

Voltage

55V

Power(Watts)

19,25W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD

LED Brand

Osram

LED Number

299

F Mark




Gear

Gear Type


Led Driver

Input Voltage

220-240V

| | |
|------------------|---|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 21-29,4W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 700mA | 30-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | Eaglerise |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 2500lm |
| Light Efficiency | 83,33lm/W |
| CRI | 80 |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Length | 25,5cm |
| Box Width | 25,5cm |
| Box Height | 6,5cm |
| Box Weight | 2.825kg |
| Pcs/Carton | 4 |
| Barcode | 5291889046639 |
| HS Code | 9405413990 |

Certification & Warranty

switch to
one light!

one
LIGHT

