

21 Industrial & Floodlights>The LED Park Light Die cast

70104/G/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

| | |
|----------------------|-----------------------------|
| Item Group | 21 Industrial & Floodlights |
| Family | The LED Park Light Die cast |
| Order Code | 70104/G/C |
| Colour | Grey |
| Material | Die Cast |
| Shape | Circular |
| Height | 605mm |
| Diameter | 450mm |
| Surface Floor/Ground | Yes |
| Outdoor | Yes |
| Adjustable | No |

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

950mA

Voltage

30V

Power(Watts)

28,5W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)


25,6-34W

Power Factor

0,9

| | |
|------------------|---|
| Constant Current | Yes |
| 950mA | 27-36V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Connector |
| Brand | Meanwell |


Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 4000K |
| Lumen Output | 2700lm |
| Light Efficiency | 90lm/W |
| CRI | 70 |
| Beam Angle | 120° |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Weight | 12,5Kg |
| Pcs/Carton | 1 |
| Barcode | 5291889035572 |
| HS Code | 9405409900 |

Energy Label

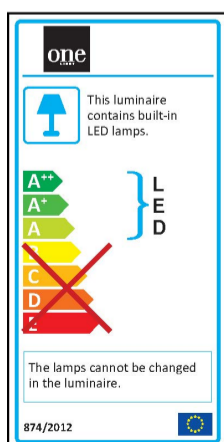

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

