

21 Industrial & Floodlights>Street Lighting

70116B/G/C



LED street light with SMD LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Post Diameter 60mm.

Complete with 968mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

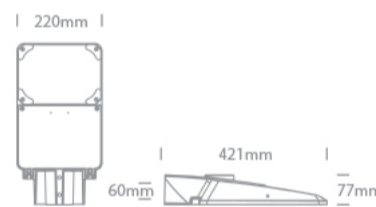

Accessories



050326

Physical Specification

Item Group

21 Industrial & Floodlights

Family

Street Lighting

Order Code

70116B/G/C

Colour

Grey

Material



Aluminium + Glass

Shape


Rectangular

Length	421mm
Width	220mm
Height	77mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No
IK Rating	9


Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	75W
IP Rating	IP66
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	968mA
Voltage	75V
Power(Watts)	72,6W
IP Rating	IP66
Light Source	LED built in
LED Type	SMD 3030

LED Brand	Seoul
LED Number	96
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	52,27-104,54W
Power Factor	0,96
Constant Current	Yes
Output	968mA
Voltage Range	54-108V
IP Rating	IP67
Safety Class	
Dimmable	No
Housing Material	Metal
Output Terminal	Connector
Brand	MOSO

Illumination Data

Colour Temperature	4000K
Lumen Output	10500lm
Light Efficiency	140lm/W
CRI	80
Beam Angle	140°x80°
Illumination Diagram	

Packing Info

Box Weight	4.100kg
------------	---------

Pcs/Carton	1
Barcode	5291889073994
HS Code	9405413990

Certification & Warranty

Warranty	5 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

