

21 Industrial & Floodlights>The Glass Face AC LED Floodlights

## 7028AG/B/C



10W AC LED flood light with adjustable mounting bracket.

IP65 rated for outdoor use.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

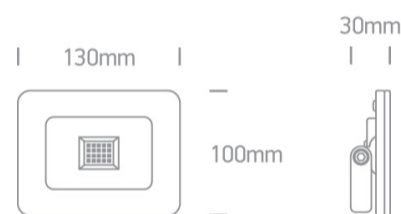

### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Glass Face AC LED Floodlights
Order Code	7028AG/B/C
Colour	Black
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	130mm
Width	100mm
Height	30mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground

Yes

Outdoor

Yes

Adjustable

1 Direction

## Electrical Characteristics

Gear

No

## Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

Cable Length

50cm

F Mark



## Illumination Data

Colour Temperature

4000K

Lumen Output

800lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

100°

Illumination Diagram



## Packing Info

Box Length


12cm

Box Width

5.4cm

Box Height	13.7cm
Pcs/Carton	20
Barcode	5291889050087
HS Code	9405409900

## Energy Label

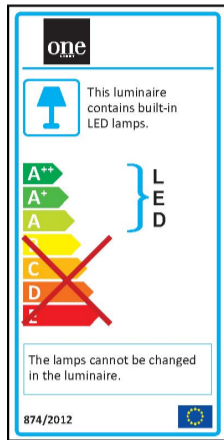

## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

