

21 Industrial & Floodlights>The Rechargeable LED Floodlights Die cast

7028AR/G/C



10W Rechargeable LED flood light in die cast housing with stand and handle. IP65 rated for outdoor use.

Supplied with AC Charger 100-240V EU/BS plug and car charger.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Rechargeable LED Floodlights Die cast
Order Code	7028AR/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	240mm
Width	150mm
Height	165mm
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes

Adjustable

1 Direction

Electrical Characteristics

Gear

Built In

Fitting + Driver

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Voltage

8,4V

Safety Class



Power(Watts)

10W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

Gear

Gear Type

Led Driver

Power(Watts)

10W

Power Factor

0,9

Constant Current

Yes

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Connector

Illumination Data

Colour Temperature

4000K

Lumen Output

700lm

Light Efficiency

70lm/W

CRI

75

Beam Angle

120°

Illumination Diagram



Packing Info

Box Length

15,5cm

Box Width

12cm

Box Height

21,5cm

Box Weight

1,2Kg

Pcs/Carton

12


Barcode

5291889038450

HS Code

9405409900

Energy Label

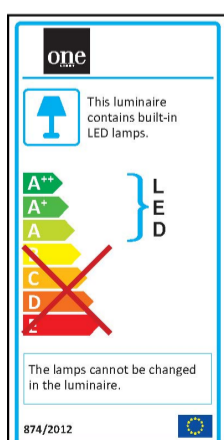

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

