

21 Industrial & Floodlights>The COB LED Slim Line Die cast

7034C/G/C



70W COB LED Slim floodlight, IP65.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

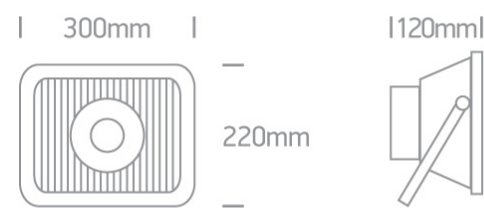

Physical Specification



Item Group	21 Industrial & Floodlights
Family	The COB LED Slim Line Die cast
Order Code	7034C/G/C
Colour	Grey
Material	Die Cast
Shape	Rectangular
Length	300mm
Width	220mm
Height	120mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes

Outdoor
Adjustable

Yes
1 Direction

Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
Cable Length
F Mark

Built In
100-240V
Yes
Yes

70W
IP65
LED built in
No
100cm


Fitting


Input Type
Input Current
Voltage
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
2100mA
32V
67,2W
IP65
LED built in
COB
Epistar


Gear

Gear Type
Input Voltage

Led Driver
100-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	46,2-75,6W
Power Factor	0,9
Constant Current	Yes
Output	2100mA
Voltage Range	22-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

Illumination Data

Colour Temperature	4000K
Lumen Output	5600lm
Light Efficiency	80lm/W
CRI	75
Beam Angle	130°
Illumination Diagram	

Packing Info

Box Length	24cm
Box Width	15cm
Box Height	33cm
Box Weight	3,3Kg
Pcs/Carton	6
Barcode	5291889034285
HS Code	9405409900



Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

