

21 Industrial & Floodlights>The LED High Power Box Aluminium

7058/W/C



IP65, LED High Power Boxes.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

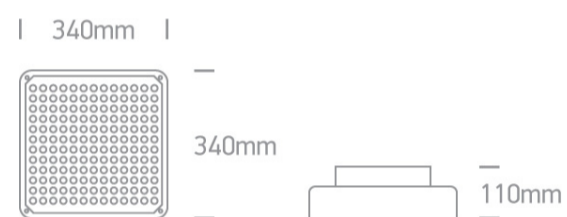

Gallery





Physical Specification


Item Group	21 Industrial & Floodlights
Family	The LED High Power Box Aluminium
Order Code	7058/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	340mm

Width	340mm
Height	110mm
Surface Ceiling	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	120W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	4200mA
Voltage	28V
Power(Watts)	118W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 3030
LED Brand	Osram

LED Number	140
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	118-151W
Power Factor	0,9
Constant Current	Yes
Output	4200mA
Voltage Range	28-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell

### Illumination Data

Colour Temperature	4000K
Lumen Output	10200lm
Light Efficiency	85lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

### Packing Info

Box Weight	9,2Kg
Pcs/Carton	2


Barcode

5291889042655

HS Code

9405409900

## Energy Label

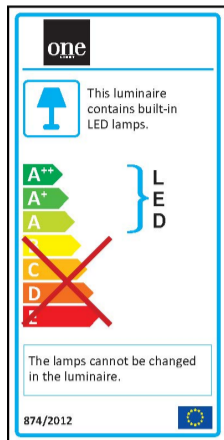

## Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

