


08 Strips & Profiles > Modules for Signs & Backlit Applications

7840D/D

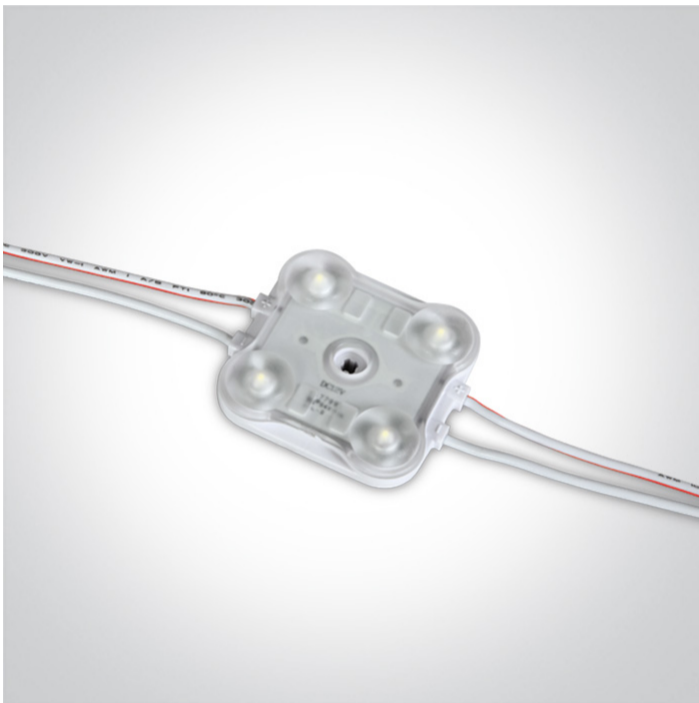

4x 0,5W/10W/m LED module, IP65 .

Supplied in 50pcs chain total length 10m.

Requires 12V DC constant voltage LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

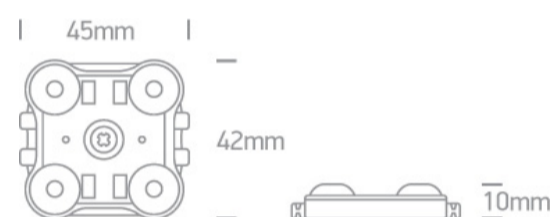

Physical Specification

| | |
|----------------------|--|
| Item Group | 08 Strips & Profiles |
| Family | Modules for Signs & Backlit Applications |
| Order Code | 7840D/D |
| Material | Plastic |
| Shape | Rectangular |
| Length | 45mm |
| Width | 42mm |
| Height | 10mm |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Surface Floor/Ground | Yes |
| Indoor | Yes |

Outdoor

Yes

Electrical Characteristics

Fitting

Input Type

Constant Voltage

Input Voltage

12V DC

Safety Class



Power(Watts)

4x0,5W

IP Rating

IP65

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

LED Number

4

F Mark



Illumination Data

Colour Temperature

6000K

Lumen Output

180lm

Light Efficiency

90lm/W

Illumination Diagram



Packing Info

Pcs/Carton

20

Barcode

5291889065630

HS Code

8539500000

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

