

08 Strips & Profiles > The 230V IP65 Range

7862/C



Mains voltage LED strip, IP65.

Available in 30m rolls.

Requires power supply order code 7862P.

Can be cut every 1 meter.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions




Gallery



Accessories




7862C



7862E



7862F



7862L






7862P

Physical Specification

Item Group	08 Strips & Profiles
Family	The 230V IP65 Range
Order Code	7862/C
Material	PVC
Shape	Rectangular
Length	30m
Height	18mm
Surface Ceiling	Yes
Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W/m
IP Rating	IP65
Light Source	LED built in
Dimmable	Yes
Dimmer type	Triac
F Mark	


Fitting	
Safety Class	

IP Rating	IP65
Light Source	LED built in
LED Type	SMD 5630
LED Brand	Epistar
LED Number	120LEDs/m

Gear

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP65
Safety Class	


Illumination Data

Colour Temperature	4000K
Lumen Output	1050lm/m
Light Efficiency	80,76lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	34cm
Box Width	34cm
Box Height	16,5cm
Box Weight	0.193kg
Pcs/Carton	30
Barcode	5291889057642
HS Code	9405423100

Energy Label

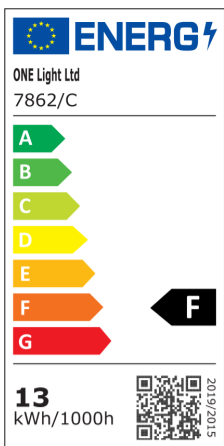

Certification & Warranty

Warranty

2 years

switch to
one light!

one
LIGHT

