

INSTALLATION MANUAL

6302

LED
BUILT IN



DIMMABLE



350mm
(with 150mm Rod)

DC 35W
MOTOR

6
SPEED



WINTER
REVERSE MOTOR



REMOTE
CONTROL

LIGHT
ON/OFF
SWITCH

22W
LED

2000
LUMEN


230V | LED 22W | DC MOTOR 35W | IP20 | Metal body | ABS blades | Rod mounted

- Maximum air flow rate 100m³/min
- Service value 2,8/W
- Standby power consumption 0,5W

- Fan sound power level 45dB(A)
- Maximum air velocity 2,6 m/sec.
- Max RPM 215



85
CRI



one
LIGHT

1

Install the fan blades and tighten screws.

2

Install LED plate and connect cable.

3

3a

Install ceiling bracket.

4

Remove the R clip from the pin. Then remove the pin from the rod.

5

A Place the parts on the rod.
B Pass wires through rod.

6

A Put the rod into the motor and install the pin and R clip.
B Tighten all the nuts and screws.

7

Hang the fan onto the ceiling bracket.

8

Place the receiver on the hanger bracket.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.

INSTALLATION MANUAL

6302

9

Blue
Brown
Green and yellow

Connect wires.

10

1
2
3

11

Install the diffuser onto the LED plate.


PACKAGE CONTENTS

- 1 Hanger bracket
- 2 Receiver
- 3 Rod assembly
- 4 Canopy
- 5 Canopy cover
- 6 Motor
- 7 22W LED
- 8 Remote control + holder
+2 mounting screws
+1.5V (AAA)x2 batteries
- 9 Cover
- 10 Diffuser
- 11 Fan blades (3pcs)
- A Screws for blades
- B Mounting hardware
- C Blade balancing kit

REMOTE CONTROL

Requires 2xAAA batteries. Remove batteries if not used for long period of time.

- 1 LED indicator
- 2 ON/OFF
- 3 Mute sound
- 4 Warm white LED
- 5 Cool white LED
- 6 Daylight LED
- 7 Fan OFF
- 8 Fan speeds: To turn fan ON 1(lowest) to 6 (highest)
- 9 LED light ON / OFF
- 10 LED dimmer
- 11 Breeze: Fan speeds automatic cycle between 1 to 6
- 12 Vacation mode: Switch on the light kit 5 minutes each 2 hours
- 13 Reverse function for winter and summer
- 14 Timer: Fan stops after 2h/4h/8h

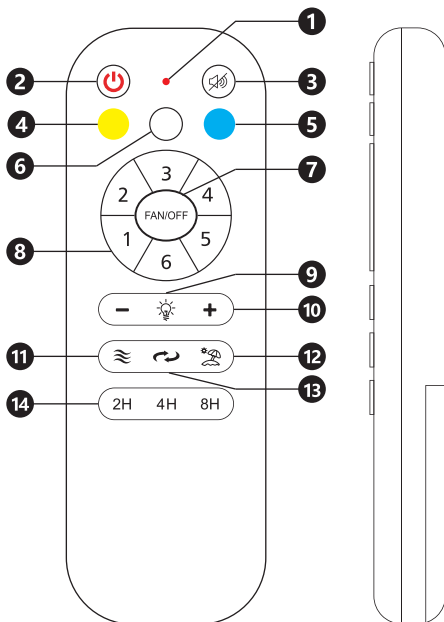

NOTE: When switching mains ON, light automatically turns on.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.