

# INSTALLATION MANUAL

65670BT/./V

LED  
BUILT IN





ADJUSTABLE



DIMMABLE

230V | COB | CCT V | 22W PV | IP20 | Aluminium  
Complete with PV driver.

90  
CRI




one  
LIGHT

1




To mount the track adaptor into the track system, first check that the selector knob **A** is at OFF position and the adaptor lock **B** is disengaged.

2

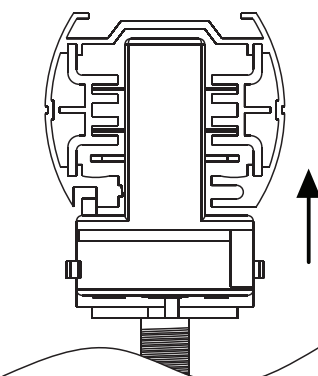

When installing the adaptor into the track, ensure that it is orientated correctly.

3

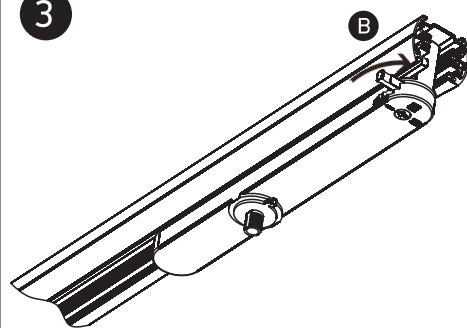

Rotate adaptor lock **B** clockwise 90° to connect the adaptor to the neutral circuit.

4




Rotate selector knob **A** to the position of desired circuit.

5

Select the power according to the table




16W	450mA	<input type="radio"/>	<input type="radio"/>
18W	500mA	<input checked="" type="radio"/>	<input type="radio"/>
20W	550mA	<input type="radio"/>	<input checked="" type="radio"/>
22W	600mA	<input checked="" type="radio"/>	<input checked="" type="radio"/>

The default setting is 22W



CCT & POWER  
VARIABLE SWITCHES

Power selection

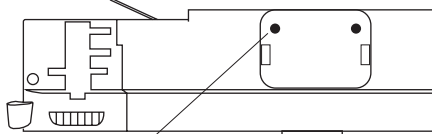

## Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.

www.1-light.eu