


www.1-light.eu



13 Wall & Ceiling LED>Dark Light Cylinders Tubes

12108D/BBS/W

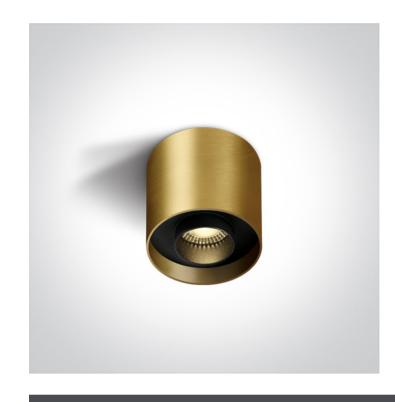

8W COB LED Cylinder CRI 90 with exchangeable reflectors.

Reflector must be order separately. Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads










Dimensions



Must be ordered separately







050206/BS



050206/W

Physical Specification

Item Group	13 Wall & Ceiling LED
Family	Dark Light Cylinders Tubes
Order Code	12108D/BBS/W
Colour	Brushed Brass
Material	Aluminium
Shape	Circular

Height	70mm
Diameter	70mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
ectrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	9,18V
Power(Watts)	6,42W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree

	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,9-6,72W
Power Factor	0,9
Constant Current	Yes
700mA	2,7-9,6V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	KEGU
Illumination Data	
Colour Temperature	3000K
Lumen Output	560lm
Light Efficiency	560lm 70lm/W
Light Efficiency	70lm/W
Light Efficiency CRI	70lm/W 90
Light Efficiency CRI Beam Angle	70lm/W 90
CRI Beam Angle Illumination Diagram	70lm/W 90 24°
CRI Beam Angle Illumination Diagram	70lm/W 90 24°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	70lm/W 90 24°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	70lm/W 90 24°
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info	70lm/W 90 24° Yes
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	70lm/W 90 24° Yes 8cm
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width	70lm/W 90 24° Yes 8cm
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height	70lm/W 90 24° Yes 8cm 8cm 8,5cm
Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height Box Weight	70lm/W 90 24° Yes 8cm 8cm 8,5cm 0.240kg

Certification & Warranty

Warranty 3 Years

Weee Directive Yes

switch to one light!

