

08 Strips & Profiles > The 19,2W/m Indoor 24V

7875/C



Flexible LED light strip, with SMD2216 LEDs, 240LEDs/meter, 19,2W/meter. Supplied in 5 meters roll with white PCB and double adhesive tape for a better fixing.

Can be cut every 5cm (12-LED segment).

Requires 24V DC constant voltage LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

Cut every 5cm
(12-LED segment)



Gallery





Physical Specification

Item Group	08 Strips & Profiles
Family	The 19,2W/m Indoor 24V
Order Code	7875/C
Shape	Rectangular
Length	5000mm
Width	16mm
Surface Ceiling	Yes

Surface Wall	Yes
Surface Floor/Ground	Yes
Indoor	Yes

Electrical Characteristics

Fitting

Input Type	Constant Voltage
Input Voltage	24V DC
Safety Class	
Power(Watts)	19,2W/m
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2216
LED Brand	Refond
LED Number	240LEDs/m
F Mark	

Illumination Data

Colour Temperature	4000K
Lumen Output	1750lm/m
Light Efficiency	91,15lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Length	26cm
Box Width	25cm
Box Height	2cm
Box Weight	0,27kg

Pcs/Carton

40


Barcode

5291889040484

HS Code

9405409989

Energy Label

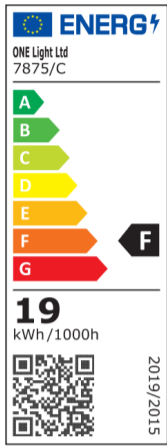

Energy Class

F

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

