


14 Plafo>The LED Slim Line Plafo

## 62160A/W/W

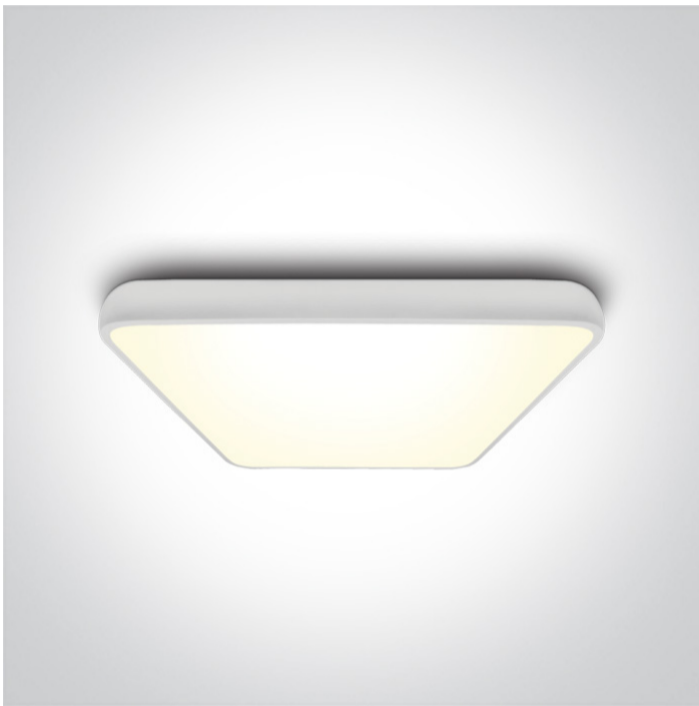

62W LED slim plafo light, IP20, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

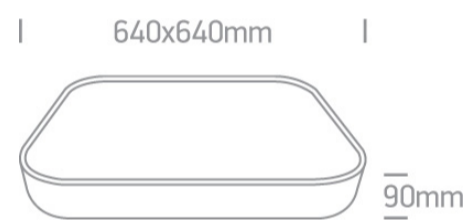

### Physical Specification

Item Group	14 Plafo
Family	The LED Slim Line Plafo
Order Code	62160A/W/W
Colour	White
Material	Metal
Shape	Rectangular
Length	640mm
Width	640mm
Height	90mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

62W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

1500mA

Voltage

39V

Safety Class



Power(Watts)

58,5W

IP Rating

IP20

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

F Mark



Gear

Gear Type

Led Driver

Input Voltage


220-240V

50 Hz


Yes

60 Hz

Yes

Power(Watts)	37,5-63W
Power Factor	0,9
Constant Current	Yes
1500mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	40°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Cable
Fast Connector	Yes
Fast Connector Type	Other
Brand	Lifud

#### Illumination Data

Colour Temperature	3000K
Lumen Output	3600lm
Light Efficiency	58,06lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	72cm
Box Width	72cm
Box Height	12cm
Box Weight	8.000kg
Pcs/Carton	1
Carton Length	72cm

Carton Width	72cm
Carton Height	12cm
Carton Weight	8Kg
Barcode	5291889056935
HS Code	9405413990

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

