

21 Industrial & Floodlights>The COB LED Street Light 20-80W

70080/AN/C



LED street light with COB LED. High lumen output ideal for replacement of old HPS and mercury street lighting fittings.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



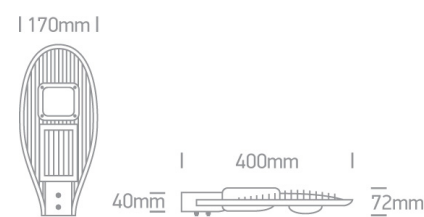

Dimensions




Physical Specification

Item Group	21 Industrial & Floodlights
Family	The COB LED Street Light 20-80W
Order Code	70080/AN/C
Colour	Anthracite
Material	Die Cast
Shape	Rectangular
Length	170mm
Width	400mm
Height	72mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No


Gear		Built In	
Fitting + Driver			
Input Voltage		220-240V	
50 Hz		Yes	
60 Hz		Yes	
Safety Class			
Power(Watts)		20W	
IP Rating		IP65	
Light Source		LED built in	
Dimmable		No	
Cable Length		60cm	
F Mark			

Fitting			
Input Type		Constant Current	
Input Current		600mA	
Voltage		32V	
Power(Watts)		19,2W	
IP Rating		IP65	
Light Source		LED built in	
LED Type		COB	
LED Brand		Epistar	

Gear			
Gear Type		Led Driver	
Input Voltage		220-240V	
50 Hz		Yes	
60 Hz		Yes	
Power(Watts)		17-20W	

Power Factor	0,9
Constant Current	Yes
600mA	28-34V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	SELF


Illumination Data

Colour Temperature	4000K
Lumen Output	1500lm
Light Efficiency	75lm/W
CRI	70
Beam Angle	120° x 60°
Illumination Diagram	

Packing Info

Box Weight	1,6Kg
Pcs/Carton	2
Barcode	5291889040897
HS Code	9405409900

Energy Label

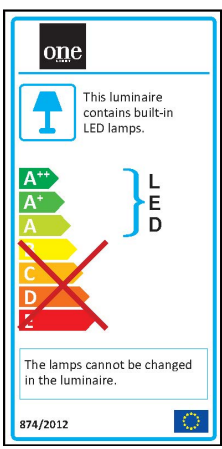

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

